


Exoset - Vertical lifting clamp

Suitable for lifting, vertical transport, turning 180° moving and vertical transfer of sheet, plates and constructions.

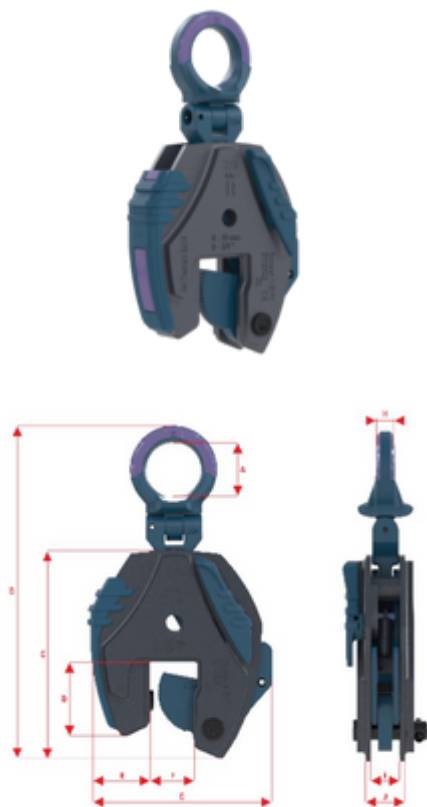

Item Name short	Jaw Opening Width [mm]	WLL t [t]	Weight Net [lbs]	WLL Vertical [lbs]	Dimension A [in]	Dimension B [in]	Dimension A [mm]
0.5t EVU	0 - 16	0.5	4.19	1100	1.53	8.22	39
0.5t EVU/H	0 - 16	0.5	4.19	1100	1.53	8.91	39
0.5t EVU/S	0 - 16	0.5	4.19	1100	1.53	8.91	39
1t EVU/H	0 - 20	1	4.63	2204	1.53	9.35	39
1t EVU/S	0 - 20	1	4.63	2204	1.53	9.35	39
2t EVU	0 - 35	2	16.75	4409	2.68	14.78	68
2t EVU/H	0 - 35	2	16.75	4409	2.68	14.78	68
2t EVU/S	0 - 35	2	16.75	4409	2.68	14.78	68
3t EVU/H	0 - 40	3	32.63	6613	2.89	17.56	73
3t EVU/S	0 - 40	3	32.63	6613	2.89	17.56	73
3t EVU	0 - 40	3	32.63	6613	2.89	17.56	73
5t EVU	0 - 40	5	35.27	11023	2.89	17.56	73
5t EVU/H	0 - 40	5	35.27	11023	2.89	17.56	73
5t EVU/S	0 - 40	5	35.27	11023	2.89	17.56	73
6t EVU	0 - 50	6	52.91	13227	3.15	21.64	80

Item Name short	Dimension B [mm]	Dimension C [in]	Dimension C [mm]	Dimension D [in]	Dimension D [mm]	Dimension E [in]	Dimension E [mm]
0.5t EVU	209	5.27	134	1.57	40	1.73	44
0.5t EVU/H	209	5.29	134	1.59	40	1.63	44
0.5t EVU/S	209	5.29	134	1.59	40	1.63	44
1t EVU/H	22	5.73	145	2.06	52	1.74	46
1t EVU/S	237	5.73	145	2.06	52	1.74	44
2t EVU	375	8.24	209	2.99	76	2.43	61
2t EVU/H	375	8.24	209	2.99	76	2.43	61
2t EVU/S	375	8.24	209	2.99	76	2.43	61
3t EVU/H	446	10.34	262	4.01	101	2.80	71
3t EVU/S	446	10.34	262	4.01	101	2.80	71
3t EVU	446	10.34	262	4.01	101	2.80	71



Exoset-Klemme

Subject to technical changes. All rights reserved. No part of this Technical Data Sheet may be reproduced in any form (print, photocopy, microfilm or any other process) or processed, duplicated or distributed using electronic systems without the written permission of SpanSet. This Technical Data Sheet has been prepared with due care; SpanSet accepts no liability for errors or omissions. © SpanSet (UK) Limited - United Kingdom

Item Name short	Dimension B [mm]	Dimension C [in]	Dimension C [mm]	Dimension D [in]	Dimension D [mm]	Dimension E [in]	Dimension E [mm]
5t EVU	446	10.34	262	4.01	101	2.80	71
5t EVU/H	446	10.34	262	4.01	101	2.80	71
5t EVU/S	446	10.34	262	4.01	101	2.80	71
6t EVU	549	12.89	327	5.19	131	2.84	97

Item Name short	Dimension F [in]	Dimension F [mm]	Dimension G [in]	Dimension G [mm]	Dimension H [in]	For Material	Dimension H [mm]
0.5t EVU	0.86	22	4.33	123	0.51	Normal max.37HRC	13
0.5t EVU/H	0.88	22	4.49	123	0.53	Hard max.47HRC	13
0.5t EVU/S	0.88	22	4.49	123	0.53	Stainless Steel max.37HRC	13
1t EVU/H	1.12	28	5.00	123	0.53	Hard max.47HRC	13
1t EVU/S	1.12	28	5.00	127	0.53	Stainless Steel max.37HRC	13
2t EVU	1.90	48	7.58	192	0.71	Normal max.37HRC	18
2t EVU/H	1.90	48	7.58	192	0.71	Hard max.47HRC	18
2t EVU/S	1.90	48	7.58	192	0.71	Stainless Steel max.37HRC	18
3t EVU/H	2.17	55	8.85	225	0.90	Hard max.47HRC	22
3t EVU/S	2.17	55	8.85	225	0.90	Stainless Steel max.37HRC	22
3t EVU	2.17	55	8.85	225	0.90	Normal max.37HRC	22
5t EVU	2.17	55	8.85	225	0.90	Normal max.37HRC	22
5t EVU/H	2.17	55	8.85	225	0.90	Hard max.47HRC	22
5t EVU/S	2.17	55	8.85	225	0.90	Stainless Steel max.37HRC	22
6t EVU	2.32	59	11.06	280	1.46	Normal max.37HRC	37



Exoset-Klemme

Subject to technical changes. All rights reserved. No part of this Technical Data Sheet may be reproduced in any form (print, photocopy, microfilm or any other process) or processed, duplicated or distributed using electronic systems without the written permission of SpanSet. This Technical Data Sheet has been prepared with due care; SpanSet accepts no liability for errors or omissions. © SpanSet (UK) Limited - United Kingdom

Item Name short	Dimension I [in]	Dimension I [mm]	Dimension J [in]	Dimension J [mm]	Weight Net [kg]	EAN Code
0.5t EVU	0.78	20	1.10	28	1.9	7610726106356
0.5t EVU/H	0.80	20	1.12	28	1.9	7610726106363
0.5t EVU/S	0.80	20	1.12	28	1.9	7610726106370
1t EVU/H	0.80	20	1.12	28	2.1	7610726106394
1t EVU/S	0.80	20	1.12	28	2.1	7610726106417
2t EVU	1.26	32	1.73	44	7.6	7610726106424
2t EVU/H	1.26	32	1.73	44	7.6	7610726106431
2t EVU/S	1.26	32	1.73	44	7.6	7610726106448
3t EVU/H	1.65	42	2.28	58	14.8	7610726106462
3t EVU/S	1.65	42	2.28	58	14.8	7610726106479
3t EVU	1.65	42	2.28	62	14.8	7610726106455
5t EVU	1.65	42	2.44	62	16	7610726106486
5t EVU/H	1.65	42	2.44	62	16	7610726106493
5t EVU/S	42	42	2.44	62	16	7610726106516
6t EVU	1.65	42	2.44	62	24	7610726106523

ORDER NUMBERS

WLL Vertical	For Material	Jaw Opening Width	0.5 t	1 t	2 t	3 t	5 t	6 t
1100 lbs	Normal max.37HRC	0 - 16 mm	2002421	-	-	-	-	-
1100 lbs	Stainless Steel max.37HRC	0 - 16 mm	2012567	-	-	-	-	-
1100 lbs	Hard max.47HRC	0 - 16 mm	2012561	-	-	-	-	-
2204 lbs	Stainless Steel max.37HRC	0 - 20 mm	-	2012568	-	-	-	-
2204 lbs	Hard max.47HRC	0 - 20 mm	-	2012562	-	-	-	-
4409 lbs	Normal max.37HRC	0 - 35 mm	-	-	2002423	-	-	-
4409 lbs	Stainless Steel max.37HRC	0 - 35 mm	-	-	2012569	-	-	-
4409 lbs	Hard max.47HRC	0 - 35 mm	-	-	2012563	-	-	-
6613 lbs	Normal max.37HRC	0 - 40 mm	-	-	-	2002424	-	-
6613 lbs	Stainless Steel max.37HRC	0 - 40 mm	-	-	-	2012570	-	-
6613 lbs	Hard max.47HRC	0 - 40 mm	-	-	-	2012564	-	-
11023 lbs	Normal max.37HRC	0 - 40 mm	-	-	-	-	2002425	-
11023 lbs	Stainless Steel max.37HRC	0 - 40 mm	-	-	-	-	2012571	-
11023 lbs	Hard max.47HRC	0 - 40 mm	-	-	-	-	2012565	-
13227 lbs	Normal max.37HRC	0 - 50 mm	-	-	-	-	-	2002426



Exoset-Klemme

Subject to technical changes. All rights reserved. No part of this Technical Data Sheet may be reproduced in any form (print, photocopy, microfilm or any other process) or processed, duplicated or distributed using electronic systems without the written permission of SpanSet. This Technical Data Sheet has been prepared with due care; SpanSet accepts no liability for errors or omissions. © SpanSet (UK) Limited - United Kingdom

■ Norms	EN 13155 ASME B30.20 DNV GL
■ Packaging Unit (PU) Content	1



Exoset-Klemme

Subject to technical changes. All rights reserved. No part of this Technical Data Sheet may be reproduced in any form (print, photocopy, microfilm or any other process) or processed, duplicated or distributed using electronic systems without the written permission of SpanSet. This Technical Data Sheet has been prepared with due care; SpanSet accepts no liability for errors or omissions. © SpanSet (UK) Limited - United Kingdom